

Nonlinear Equilibrium and Stability Analysis of Axially Loaded Piles Under Bilateral Contact Constraints

Abstract

This paper presents a nonlinear stability analysis of piles under bilateral contact constraints imposed by a geological medium (soil or rock). To solve this contact problem, the paper proposes a general numerical methodology, based on the finite element method (FEM). In this context, a geometrically nonlinear beam-column element is used to model the pile while the geological medium can be idealized as discrete (spring) or continuum (Winkler and Pasternak) foundation elements. Foundation elements are supposed to react under tension and compression, so during the deformation process the structural elements are subjected to bilateral contact constraints. The errors along the equilibrium paths are minimized and the convoluted nonlinear equilibrium paths are made traceable through the use of an updated Lagrangian formulation and a Newton-Raphson scheme working with the generalized displacement technique. The study offers stability analyses of three problems involving piles under bilateral contact constraints. The analyses show that in the evaluation of critical loads a great influence is wielded by the instability modes. Also, the structural system stiffness can be highly influenced by the representative model of the soil.

Keywords

Piles, elastic foundation, stability, nonlinear analysis, geometric nonlinearities, bilateral contact.

Ricardo A. da Mota Silveira ^{a*}

Felipe Vieira Maciel ^a

Andréa Regina Dias Silva ^a

Fernando Carlos S. Machado ^b

Christianne de Lyra Nogueira ^c

^a Department of Civil Engineering,
School of Mines, Federal University of
Ouro Preto, Minas Gerais, Brazil

^b Federal Institute of Education, Science
and Technology of São Paulo

^c Department of Mines Engineering,
School of Mines, Federal University of
Ouro Preto, Minas Gerais, Brazil

*Author email: ricardo@em.ufop.br

<http://dx.doi.org/10.1590/1679-78251173>

Received 22.01.2013

In revised form 28.08.2014

Accepted 31.08.2014

Available online 13.10.2014

1 INTRODUCTION

The structural elements used to transfer load from a super-structure to the geological medium include such elements as beams, piles, arches, plates, and shells. These elements, during the deformation process, can lose contact with the geological medium due to the medium's incapacity to react under tension. This kind of problem, known as a unilateral contact problem, leads to important differences in the reactions of foundation elements and in the internal stress of structural elements. Such differences result in the remaining contact area being subjected to high stress concentrations. Researchers have, since the 70's, actively studied the unilateral contact problem (Silveira *et al.*, 2013; Celep *et al.*, 2011; Sapountzakis and Kampitsis, 2010; Silveira *et al.*, 2008; Holanda and Gonçalves, 2003; Silva *et al.*, 2001; Silva, 1998; Silveira, 1995; Stein and Wriggers, 1984; Weitsman, 1970). A separate type of problem is the bilateral contact problem (Yu *et al.*, 2013; Maciel, 2012; Shen, 2011 and 2009; Kien, 2004; Naidu and Rao, 1995). Bilateral contact problems involve support systems found in civil and mine engineering where structural elements are completely attached to the geological medium. Examples include piles embedded in soils, underground pipelines, and circular or parabolic tunnel roofs. In the context of physical and geometric linearity, these engineering problems can be treated as simple structural minimization problems; numerical solutions, and even analytical solutions, can be easily achieved (Tsudik, 2013; Selvadurai, 1979; Hetényi, 1946).

Some contexts, however, involve non-linear effects. In recent years, many studies have considered such effects in their analyses of bilateral contact problems under extreme static and dynamic loads (Fazelzadeh and Kazemi-Lari, 2013; Challamel, 2011; Sofiyev, 2011; Roy and Dutta, 2010; Dash *et al.*, 2010; Manna and Baidya, 2010). In nonlinear structural and geotechnical problems with bilateral constraints, the property and characteristics of the geological medium can highly influence the support systems' equilibrium paths. Researchers trying to resolve these kinds of issues have made significant advances in several engineering fields leading to the development of new materials and techniques of analyses. Perhaps the greatest contribution in these advances has been the development of more precise computational tools, whose models allow a realistic simulation of problems (Silva, 2009). To come up with slenderer and lighter support systems and constructions, without compromising quality and security standards, engineers have had to evaluate a structure's behavior by considering its nonlinear effects as well as the structure's interaction with the soil-structure (Kausel, 2010).

Nonlinear bilateral structural contact problems are usually formulated by using numerical techniques (Maciel, 2012; Mullanpudi and Ayoub, 2010; Matos Filho *et al.*, 2005; Horibe and Asano, 2001), such as finite element method (FEM) or boundary element method (BEM). Regarding the contact constraints, one is able to transform the contact problem—by using the usual formulations of structural mechanics—into a minimization problem without constraint. As the problem's solution depends heavily on the constitutive model of geological medium, one can expect to find the best results by adopting a more rigorous mechanical model. Kausel (2010), Wang *et al.* (2005), and Dutta and Roy (2002) provide a state-of-the-art review for soil-structure interaction. To solve this kind of contact problem, these researchers suggest bars and plates on elastic foundation and soil modeling as well as analytical and numerical possibilities.

Classical references on structural stability (Brush and Almroth, 1975; Simitzes and Hodges, 2006) involve analytical solutions of piles under contact constraints imposed by Winkler-type foundations. These solutions provide the pinned-pile critical load expression as a function of the number of half-wave imperfection mode and the dimensionless foundation parameter. Ai and Han (2009) and Ai and Yue (2009) studied the behavior of piles embedded in a multi-layered soil and subjected to axial load. Researchers have also examined such subjects as load-deflection response, stability analysis, and the buckling and initial post-buckling behavior of bilaterally constrained piles, as found in Fazelzadeh and Kazemi-Lari (2013), Challamel (2011), Chen and Baker (2003), Sironic *et al.* (1999), Chai (1998), Budkowska (1997a,b), Budkowska and Szymczak (1997), West *et al.* (1997), and Naidu and Rao (1995). Recently, Tzaros and Mistakidis (2011) presented the critical loads and buckling modes of columns under unilateral contact constraints. Limkatanyu and Spacone (2002, 2006) presented three formulations of frame elements with nonlinear lateral deformable supports. To analyze the problem of a pile partially buried in an elastic medium, Aljanabi *et al.* (1990) developed a contact finite element that took into account the normal stiffness of soil and the soil-structure friction. Badie and Salmon (1996) solved the same problem but by using a quadratic order elastic foundation finite element. Besides the normal stiffness of soil and the soil-structure friction, they considered the interaction between the individual springs, such as those used in the Pasternak-type foundation model.

The importance of considering the Pasternak's model to represent the ground was explored by Shirima and Giger (1992) using a Timoshenko-beam element that incorporated both stiffness parameters of the base. The model's importance was also investigated by Mullapudi and Ayoub (2010) who analyzed a bar of finite size in contact with sandy clay based on a mixed formulation (approximations of forces and displacements). The stability of piles on a Pasternak foundation has also been examined in Naidu and Rao (1995), Kien (2004), and Shen (2011). Horibe and Asano (2001) used the boundary element method (BEM) to study bars in contact with a Pasternak-type base (or Filonenko-Borodich), considering large displacements.

The main objective of this paper is twofold. First, it proposes a numerical methodology for the geometrically nonlinear analysis of piles under bilateral contact constraints. Second, it studies the influence of the geological medium and its stiffness on the piles' nonlinear equilibrium path and buckling behavior. To model the piles, we use a nonlinear beam-column element (Alves, 1995; Silva, 2009); to approximate the geological medium's behavior, we use individual springs (discrete model) or a bed of springs (continuum models) that exhibit a non-sign-dependent force-displacement relationship (Silva, 1998; Maciel, 2012).

An updated Lagrangian formulation is adopted to follow the system's movement, ignoring the influence of friction in the contact area. The contact regions between the bodies are known a priori and the nonlinear problem involves as a variable only the pile-soil displacement field. To solve the resulting algebraic nonlinear equations with contact constraints, and to obtain the structural equilibrium configuration at each load step, the present work presents an iteration solution strategy using the Newton-Raphson scheme coupled with the generalized displacement method (Crisfield, 1991; Yang and Kuo, 1994).

To verify the proposed numerical solution, this paper presents three problems. The first one investigates the influence of the position and stiffness of a spring elastic support on the pile's crit-

ical load (Brush and Almroth, 1975); the second analyzes the elastic stability behavior of slender pinned piles under contact constraint imposed by a Winkler-type foundation throughout its length (Brush and Almroth, 1975; Simitzes and Hodges, 2006); the third studies the nonlinear behavior and stability of piles with different end conditions in contact with a Pasternak-type foundation (Naidu and Rao, 1995; Kien, 2004; Shen, 2011). These examples demonstrate the accuracy and versatility of the present numerical strategy in the nonlinear solution of piles under bilateral constraints.

2 THE BILATERAL CONTACT PROBLEM

Consider the support system shown in Figure 1a and its mathematical model in Figure 1b. It consists of a pile and an elastic foundation. Assume that both bodies may undergo large deflections and rotations but with only small strains that are within the material's elastic range. Assume also that the contact surface is bonded and frictionless, and the region S_C corresponds to the region where contact occurs, which is known *a priori*. Consider now that the variables are known at 0 and t equilibrium configurations, and the solution at $t + \Delta t$ configuration is required (Figure 1c).

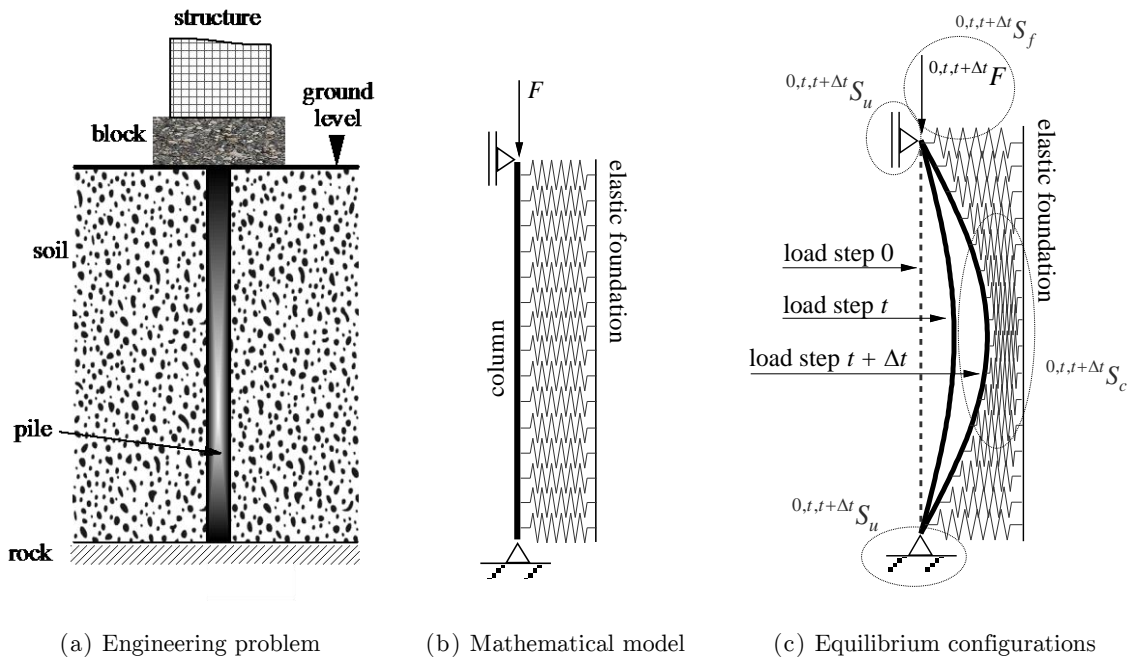


Figure 1: Pile under bilateral contact constraints imposed by an elastic foundation.

Particularly well suited for numerical analysis, the nonlinear bilateral contact problem can be solved through the following minimization problem (Maciel, 2012):

$$\text{Min } (\Delta \mathbf{u}, \Delta \mathbf{u}_b) \tag{1}$$

$$\text{Subject to: } \varphi = 0, \text{ on } S_c \tag{2}$$

with the functional Π written as:

$$\Pi = \int_V ({}^t \boldsymbol{\sigma} + \frac{1}{2} \Delta \mathbf{S}) \Delta \boldsymbol{\varepsilon} dV + \int_{t+\Delta t S_c} ({}^t \mathbf{r}_b + \frac{1}{2} \Delta \mathbf{r}_b) \Delta \mathbf{u}_b d^{t+\Delta t} S_c - \int_{t+\Delta t S_f} {}^{t+\Delta t} \mathbf{F}_i \Delta \mathbf{u}_i d^{t+\Delta t} S_f \tag{3}$$

in which $\boldsymbol{\sigma}$ is the Cauchy's stress vector; \mathbf{S} is the 2nd Piola-Kirchhoff's stress vector; $\boldsymbol{\varepsilon}$ is the Green-Lagrange's strain vector; r_b is the reaction vector of the elastic foundation; u_b is the displacements vector of the elastic foundation; u is the displacements vector of the structure and \mathbf{F} is the external forces vector specified on S_f and assumed to be independent of the bodies' deformations. In addition, Δ represents an incremental quantity while superscripts t and $t + \Delta t$ define the reference configuration.

The equality (2) gives the contact condition — the gap in the potential contact area is always zero — after the increment of the displacements, that must be satisfied on S_c in the configuration $t + \Delta t$. According to Figure 2, S_c can be one contact region, some regions, or even some discrete points. Thus, for a given load increment, the unknown variables in the configuration $t + \Delta t$ may be obtained by solving the above minimization problem. What makes the problem difficult to solve directly is the geometrically nonlinear nature of this analysis. The following sections demonstrate how this kind of nonlinearity may be treated.

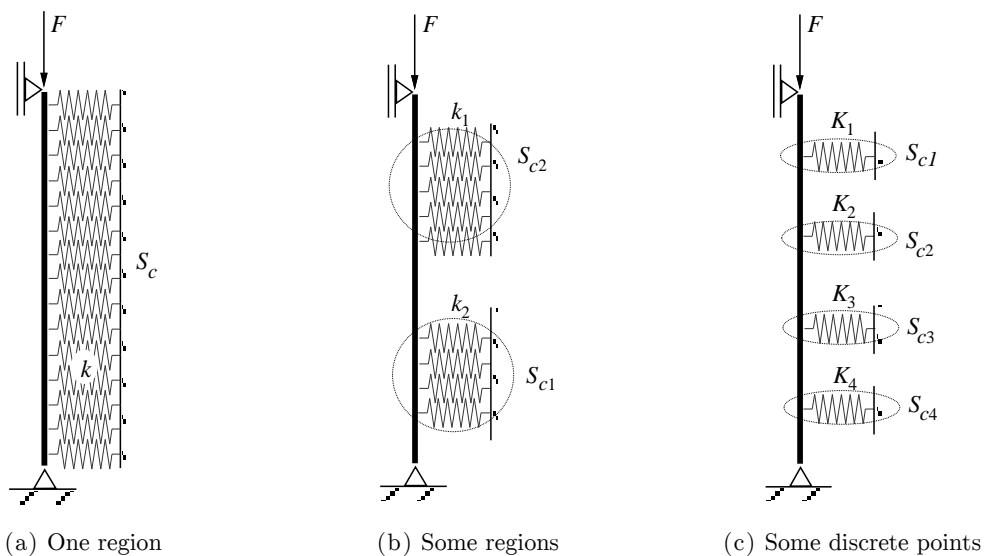


Figure 2: Different domain situations for the definition of the contact region S_c .

3 THE GEOMETRICALLY NONLINEAR ANALYSIS

This section presents the numerical solution process of the geometrically nonlinear problem. The first step is to discretize the structural problem by using the finite element method. In this context, one can assume that, for a generic structural element, the incremental displacement field $\Delta \mathbf{u}$ within the element is related to the incremental nodal displacements $\Delta \hat{\mathbf{u}}$ by:

$$\Delta \mathbf{u} = \mathbf{H} \Delta \hat{\mathbf{u}} \quad (4)$$

where \mathbf{H} is the usual FE interpolation functions matrix.

To evaluate the corresponding incremental strains and stresses, one can write the Green-Lagrange increment tensor and the 2nd Piola-Kirchhoff stress increment tensor using the following expressions (Bathe, 1996):

$$\Delta \boldsymbol{\varepsilon} = (\mathbf{B}_L + \mathbf{B}_{NL}) \Delta \hat{\mathbf{u}} \quad (5)$$

$$\Delta \mathbf{S} = \mathbf{C} \Delta \boldsymbol{\varepsilon} \quad (6)$$

where \mathbf{B}_L is the same strain-displacement matrix as in the linear infinitesimal strain analysis and it is obtained by appropriately differentiating and combining the rows of \mathbf{H} ; \mathbf{B}_{NL} depends on \mathbf{H} and the incremental displacements; and \mathbf{C} is the constitutive matrix.

The foundation soil's action, or simply the foundation's action, on the structural elements depends on the displacements and stresses on the foundation soil itself. However, as in many engineering applications the designer is interested in only the response of the foundation at the contact area and not in the stresses and displacements in the ground foundation, it is possible to develop a simple mathematical model to describe, with a reasonable degree of accuracy, the response of the foundation soil at the contact zone. This can be done by using the well-known Winkler's model (Kerr, 1964) or even the formulation for the elastic half-space (Cheung, 1977). Thus, the elastic foundation's behavior for a generic element can be written by the following discrete equilibrium equation:

$$\Delta \mathbf{r}_b = \mathbf{C}_b \Delta \mathbf{u}_b \quad (7)$$

where $\Delta \mathbf{r}_b$ and $\Delta \mathbf{u}_b$ are the incremental elastic foundation reaction and displacement nodal values, respectively; and, \mathbf{C}_b is the constitutive matrix of the elastic foundation. Thus, for a generic elastic foundation element, the incremental displacement field $\Delta \mathbf{u}_b$ may be related to its nodal values as:

$$\Delta \mathbf{u}_b = \mathbf{B}_b \Delta \hat{\mathbf{u}}_b \quad (8)$$

where \mathbf{B}_b is the matrix containing the interpolation functions that describe the elastic base deformation.

Using the previous definitions and assuming that in the contact area the structure and elastic foundation nodal displacements are identical (i.e., $\Delta \hat{\mathbf{u}}_b = \Delta \hat{\mathbf{u}}$) and do not change, one arrives at the discretized functional of the contact problem, Eq. (3), at the element level:

$$\begin{aligned} \bar{\Pi} = & \frac{1}{2} \Delta \hat{\mathbf{u}}^T \int_{i\bar{V}} \mathbf{B}_L^T \mathbf{C} \mathbf{B}_L d^t \bar{V} \Delta \hat{\mathbf{u}} + \frac{1}{2} \Delta \hat{\mathbf{u}}^T \int_{i\bar{V}} (\mathbf{B}_L^T \mathbf{C} \mathbf{B}_{NL} + \mathbf{B}_{NL}^T \mathbf{C} \mathbf{B}_L + \mathbf{B}_{NL}^T \mathbf{C} \mathbf{B}_{NL}) d^t \bar{V} \Delta \hat{\mathbf{u}} + \\ & + \Delta \hat{\mathbf{u}}^T \int_{i\bar{V}} \mathbf{B}_L^T {}^t \sigma d^t \bar{V} + \Delta \hat{\mathbf{u}}^T \int_{i\bar{V}} \mathbf{B}_{NL}^T {}^t \sigma d^t \bar{V} + \\ & + \frac{1}{2} \Delta \hat{\mathbf{u}}^T \int_{i\bar{S}_c} \mathbf{B}_b^T \mathbf{C}_b \mathbf{B}_b d^t \bar{S}_c \Delta \hat{\mathbf{u}} + \Delta \hat{\mathbf{u}}^T \int_{i\bar{S}_c} \mathbf{B}_b^T {}^t \mathbf{r}_b d^t \bar{S}_c - \Delta \hat{\mathbf{u}}^T \int_{0\bar{S}_f} \mathbf{H}^T {}^{t+\Delta t} \mathbf{F} d^0 \bar{S}_f \end{aligned} \tag{9}$$

Taking the appropriate variations of $\bar{\Pi}$ with respect to the incremental nodal displacements, and adding the contributions of each finite element, one can write:

$$[\mathbf{K}_L + \mathbf{K}_\tau + \mathbf{K}_{NL} + \mathbf{K}_b] \Delta \mathbf{U} + {}^t \mathbf{F}_{is} + {}^t \mathbf{F}_{ib} = {}^{t+\Delta t} \mathbf{R} \tag{10a}$$

or, more concisely:

$${}^{t+\Delta t} \mathbf{F}_i \Delta \mathbf{U} = {}^{t+\Delta t} \mathbf{R} \tag{10b}$$

where $\Delta \mathbf{U}$ contains the global nodal incremental displacements and ${}^{t+\Delta t} \mathbf{F}_i$ is the internal generalized forces vector of the support system in the load step $t + \Delta t$. Equation (10a) or (10b) is the equation that must be satisfied in an incremental process to obtain the system equilibrium.

On the left side of (10a), \mathbf{K}_L is the global stiffness matrix for small displacement; the matrix \mathbf{K}_τ is the initial stress matrix or geometric matrix; the matrix \mathbf{K}_{NL} is the large displacement matrix, which contains only linear and quadratic terms in the incremental displacement; and \mathbf{K}_b is the stiffness matrix of the elastic foundation (Maciel, 2012). All these matrices contribute on the assemblage of the tangent stiffness matrix used in numerical solution procedure presented on the next section. Vectors ${}^t \mathbf{F}_{is}$ represents the internal force vector of the structure and vector ${}^t \mathbf{F}_{ib}$ the elastic foundation in the equilibrium configuration t . They are typically computed by integrating the generalized stress resultants through the volume of each element and then summing the elemental contributions (Bathe, 1996).

On the right side of (10a), vector ${}^{t+\Delta t} \mathbf{R}$ is the nodal external load vector in the step $t + \Delta t$ and is given by:

$${}^{t+\Delta t} \mathbf{R} = {}^{t+\Delta t} \lambda \mathbf{R}_r \tag{11}$$

which is assumed to be independent of the structure's deformation; \mathbf{R}_r is a fixed load vector, termed reference vector defining the load direction, and ${}^{t+\Delta t} \lambda$ is a scalar load multiplier which defines the intensity of the applied load.

4 NUMERICAL SOLUTION PROCEDURE

This section presents the main characteristics of the numerical solution strategy adopted for the minimization problem defined by Eqs. (1) and (2), considering the geometric nonlinearity and the bilateral contact constraints.

To obtain nonlinear equilibrium paths, this study considers an incremental and iterative solution strategy. It is assumed that perfect convergence was achieved in the previous load steps $0, \dots, t$ (Figure 1c), i.e., the solution of the previous steps satisfied the equilibrium equations and all contact constraints. Therefore, considering the updated Lagrangian formulation — which is more appropriate to obtain the tracking of interfaces between different materials or surfaces and also due the nonlinear finite element formulation adopted (Section 5) —, the known displacements and stresses obtained at the conclusion of load step t are used as information to obtain the adjacent equilibrium configuration $t + \Delta t$. A cycle of the incremental and iterative strategy can be summarized in two steps:

1. As a starting point, the strategy employs an approximate solution, called a “tangential incremental solution.” This approximate solution involves selecting an initial increment of the load. To calculate the initial load increment, the strategy then considers an additional constraint equation, which uses the “generalized stiffness parameter” equation (Yang and Kuo, 1994); S_c defines the contact regions between the bodies and during the incremental process remains constant. To calculate the initial increment of the displacements, the strategy employs this initial load increment approximation, $\Delta\lambda^0$; it also uses it to define what is called “tangential incremental solution,” a solution that rarely satisfies the equilibrium equations. Hence, the strategy must use a correction.
2. This correction deals with the geometric nonlinearity of the problem. It can be achieved by coupling the Newton-Raphson method and path-following techniques (continuation methods; Crisfield, 1991). The strategy uses the generalized displacement method developed by Yang and Kuo (1994) to allow limit points to be passed and, consequently, to identify snap buckling phenomena. If the convergence criterion is not satisfied, the correction procedure is repeated until it is. The numerical solution procedure summarized above is detailed in Figure 3.

5 NUMERICAL APPLICATIONS

In this section, the methodology presented for nonlinear static analysis is used to obtain the responses of three stability problems involving piles under bilateral contact constraints. Consistent units are used in all problems and the proposed numerical solution strategy considers a convergence tolerance factor equal to 10^{-4} . To model the piles, it is adopted the nonlinear beam-column element developed by Alves (1995) and improved by Silva (2009). Basically, the nonlinear beam-column element formulation presents as main characteristics: the adoption of the Bernoulli-Euler simplifications (all sections remain normal to element axis and cross-sections remain plane after loading application); the shear deformation effect is disregarded; the geometrically nonlinear kinematics follow, as already mentioned, the Green-Lagrange tensor; the internal force vector increment is obtained using the natural displacement approach; and linear material behavior.

The proposed finite element contact problem formulation as well as the numerical solution methodology (Section 4) were implemented and adapted in FORTRAN language in a new computational system for advanced structural analysis, CS-ASA, which performs the nonlinear static and dynamic analyses of steel members and framed system structures (Silva, 2009).

5.1 Piles with Intermediate Elastic Spring Support

Brush and Almroth (1975) presented the analytical solution for the critical load (P_{cr}) of a pinned pile, represented by a bar with length L and bending stiffness EI , with an intermediate elastic spring, represented by its linear stiffness K_x in the horizontal direction X , located at a distance c from the pile top, as depicted in Figure 4.

To investigate the influence of the intermediate elastic spring on the pile's critical load, several analyses were performed, maintaining as constant the length L and the bending stiffness EI of the pile and varying the position c and the linear stiffness K_x of the intermediate elastic spring.

Algorithm: SUPPORT SYSTEM NONLINEAR STABILITY ANALYSIS

- 1: Read the input data: geometric, material and loading properties of the structural system
- 2: Define the contact regions S_c and obtain the reference nodal load vector, F_r (loading direction)
- 3: $t = 0$
- 4: $t_1 = t$
- 5: Select the initial load increment $(\Delta\lambda^0)_1$, Crisfield (1981)
- 6: for each load increment do ▷ INCREMENTAL LOAD PROCESS
- 7: $t = t_1$ ▷ Previous load step
- 8: $t_1 = t + 1$ ▷ Current load step
- 9: Form the structural system tangent stiffness matrix: $\mathbf{K} = \mathbf{K}_s + \mathbf{K}_b$
- 10: Solve for the tangent displacement vector $\mathbf{K}\delta\mathbf{U}_r = \mathbf{F}_r$:
- 11: if $t_1 = 1$ then
- 12: ${}^1\delta\mathbf{U}_r = \delta\mathbf{U}_r$; $\Delta\lambda^0 = \Delta\lambda^0_1$
- 13: else
- 14: $\Delta\lambda^0 = \pm \Delta\lambda^0_1 \sqrt{{}^1\delta\mathbf{U}_r^T \delta\mathbf{U}_r / {}^1\delta\mathbf{U}_r^T \delta\mathbf{U}_r}$, Yang and Kuo (1994)
- 15: end if
- 16: Evaluate the initial incremental displacement vector: $\Delta\mathbf{U}^0 = \Delta\lambda^0\delta\mathbf{U}_r$
- 17: for $k \leftarrow 1$, *maximum number of iterations (nmax)* do ▷ ITERATIVE PROCESS
- 18: Evaluate the internal forces vector: ${}^t_1\mathbf{F}_i^{k-1} = {}^t\mathbf{F}_i + \mathbf{K}_s\Delta\mathbf{U}^{k-1} + \mathbf{K}_b\Delta\mathbf{U}^{k-1}$
- 19: Evaluate the residual force vector:
- 20: $\mathbf{g}^{k-1} = {}^t_1\lambda^{k-1}\mathbf{F}_r - {}^t_1\lambda^{k-1}\mathbf{F}_i^{k-1}$
- 21: if $|\mathbf{g}^{k-1}| / |\Delta\lambda^{k-1}\mathbf{F}_r| \leq \textit{tolerance factor}$ then
- 22: Exit the iterative process and go to line 34
- 23: else
- 24: if $k = \textit{nmax}$ then reduce $\Delta\lambda^0$ by half and restart the incremental process (go to line 18)
- 25: end if
- 26: if standard Newton-Raphson method then
- 27: Update the tangent stiffness matrix $\mathbf{K} = \mathbf{K}_s + \mathbf{K}_b$
- 28: end if
- 29: Update the load parameter correction $\delta\lambda^k$ (Yang and Kuo, 1994)
- 30: $\delta\lambda^k = {}^t\delta\mathbf{U}_r^T \delta\mathbf{U}_g^k / {}^t\delta\mathbf{U}_r^T \delta\mathbf{U}_r^k$, with: $\delta\mathbf{U}_g^k = \mathbf{K}^{-1}\mathbf{g}^{k-1}$ and $\delta\mathbf{U}_r^k = \mathbf{K}^{-1}\mathbf{F}_r$
- 31: Evaluate the nodal displacement correction vector:
- 32: $\delta\mathbf{U}^k = \delta\mathbf{U}_g^k + \delta\lambda^k\delta\mathbf{U}_r^k$
- 33: Update the load parameter and the nodal displacement vector:
- 34: $\Delta\lambda^k = \Delta\lambda^{k-1} + \delta\lambda^k$ and $\Delta\mathbf{U}^k = \Delta\mathbf{U}^{k-1} + \delta\mathbf{U}^k$ ▷ Incremental variables
- 35: ${}^t_1\lambda^k = {}^t\lambda + \Delta\lambda^k$ and ${}^t_1\mathbf{U}^k = {}^t\mathbf{U} + \Delta\mathbf{U}^k$ ▷ Total variables

```
33:   end for
34:   Update the structural system variables (nodal coordinates and internal forces vector)
35: end for
```

Figure 3: Numerical strategy for support system nonlinear stability analysis.

Presented in Figure 4 are the results obtained by Brush and Almroth (1975), using different dimensionless stiffness parameter $\beta = \pi^2 K_x L / P_E$, in terms of the normalized position (c/L) and normalized critical load (P_{cr}/P_E), where $P_E = \pi^2 EI / L^2$ is the Euler's critical load.

As can be observed in Figure 4, the numerical results obtained by this work are in good agreement with those presented by Brush and Almroth (1975). For a normalized position of 0.5 and β higher than 150, the elastic spring can be considered as a rigid support, with $P_{cr} \cong 4P_E$, which is the critical load of a pinned pile of length $L/2$. To behave as a rigid support, an intermediate elastic spring located at the normalized position less than 0.5 should present a β parameter higher than 150. For an elastic spring with high stiffness and located near the pile top ($c/L \cong 0$), the value of P_{cr} tends to $2.05 P_E$, which is equal to the fixed-pinned pile buckling load.

The same analyses performed with a pinned pile were conducted while adopting a fixed-free end condition. Results are presented in Figure 5. It should be noted that for β higher than 100, the discrete elastic spring already behaves as if it were a rigid support, regardless of the spring location. As expected, for the elastic spring located near of top pile ($c/L = 0$) and with high values of β the critical load obtained is about $2.05 P_E$, which is the critical load of a fixed-pinned pile.

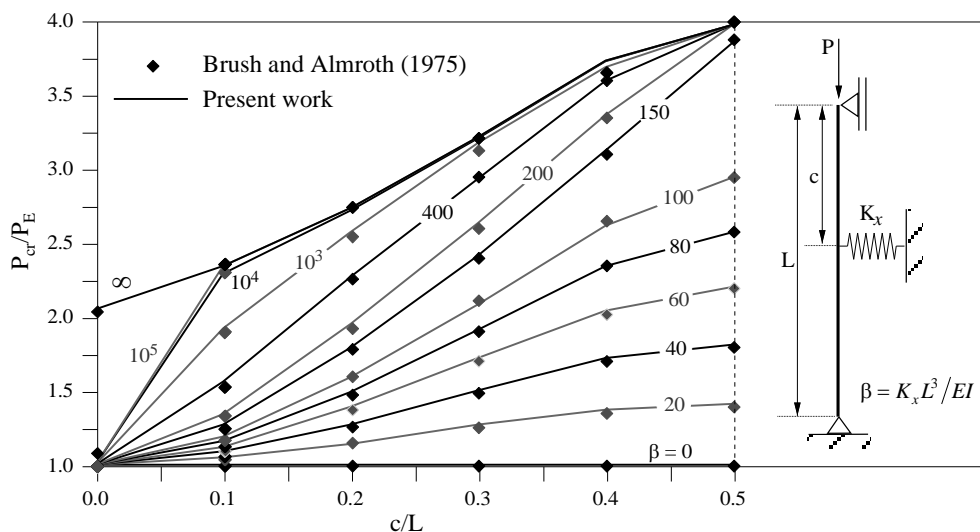


Figure 4: Critical loads of pinned piles with intermediate elastic spring support.

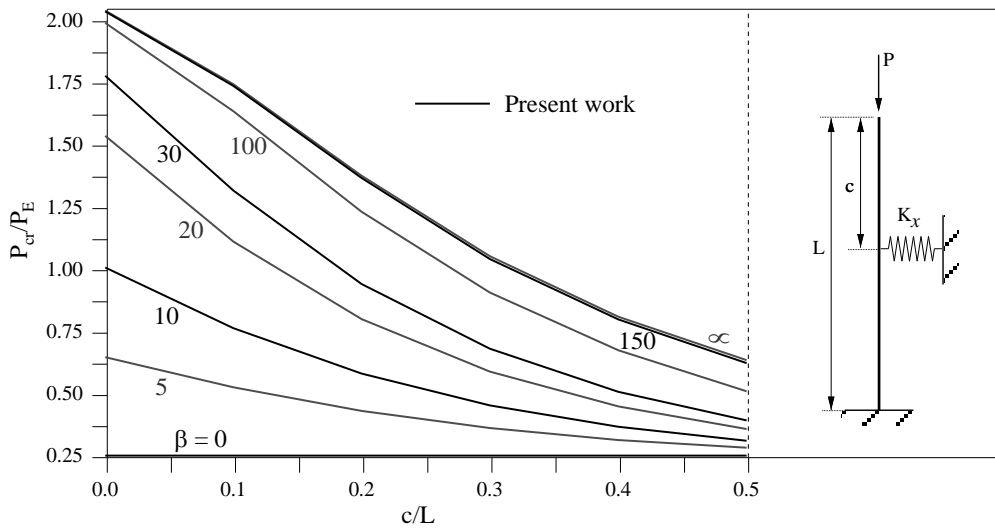


Figure 5: Critical loads of fixed-free piles with intermediate elastic spring support.

5.2 Pinned Piles in Contact with a Winkler Type Foundation

Let us now look at the classical structural and geotechnical problem shown in Figure 6, i.e, the elastic stability analysis of slender pinned piles under a bilateral contact constraint imposed by a Winkler-type foundation throughout its length.

Brush and Almroth (1975) and Simitse and Hodges (2006) showed that, as in the elastic instability of plates and shells, the buckling mode plays an important role in the stability of this type of problem. This means that the number of semi-waves' modes on the analytical solution has great influence on the pile's critical load value. According to these authors, the pile's critical load could be calculated by the following expression:

$$\frac{P_{cr}}{P_E} = n^2 + \frac{\beta_w}{n^2} \tag{12}$$

where n is the number of semi-waves considered, $\beta_w = kL^2/(\pi^2 P_E)$ is the dimensionless stiffness parameter, and $P_E = \pi^2 EI/L^2$ is Euler's critical load.

For a pinned pile such as the one illustrated in Figure 6 with characteristics of $L = 5$, $EI = 100$ and $k = 10$ (all in compatible units) and considering $n = 1$ (one semi-wave), it is, according to Eq. (12), possible to obtain a pile critical load of 64.8.

To verify the influence of the discretization on the critical load, different analyses were conducted varying the number of finite elements and the elastic base models (discrete and continuum or Winkler-type). Table 1 presents the pile critical loads and the errors (related to the analytical solution of 64.8) observed when varying the number of finite elements from 4, 6, 8, 10, and 20. Note the good agreement for both models for the mesh with eight finite elements. Figure 7 shows the support system equilibrium paths for the two models by using a mesh with four finite elements.

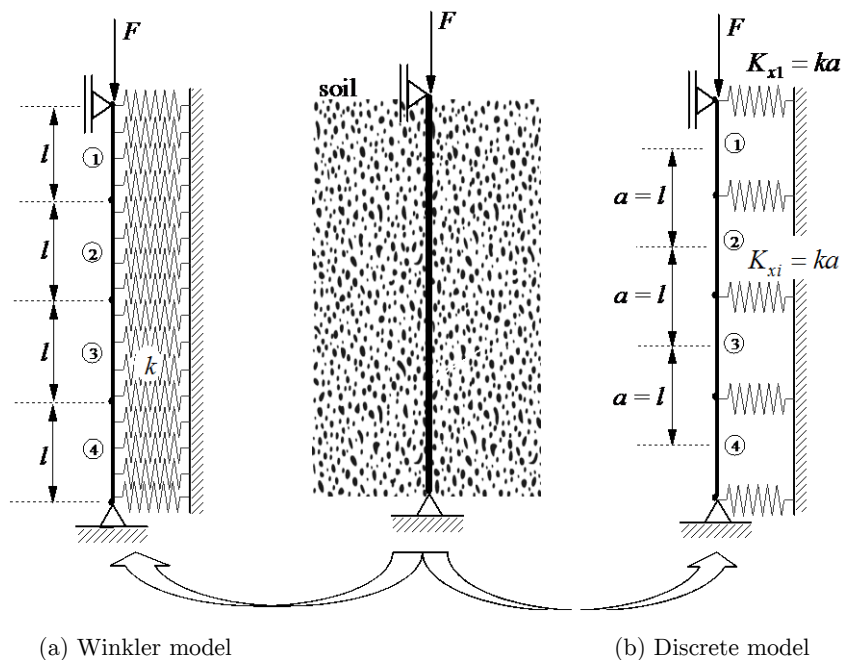


Figure 6: Pinned pile under bilateral contact constraints.

To investigate the influence of the elastic foundation stiffness of a Winkler base model on the pile’s critical load, two analyses were performed maintaining as constant the length ($L = 10$) and the bending stiffness ($EI = 100$) of the pile and varying the dimensionless stiffness parameter β_w .

Figure 8 presents the numerical results in terms of the equilibrium paths for different numbers of semi-waves considering the dimensionless stiffness parameter β_w of 16 and 48. The numerical results are in a good agreement with those presented by Brush and Almroth (1975).

Number of finite elements	Elastic base model			
	Discrete springs		Winkler model	
	P_{cr}	Error (%)	P_{cr}	Error (%)
4	41.96	35.26	64.67	0.21
6	65.48	1.04	69.03	6.51
8	64.57	0.37	64.55	0.40
10	64.56	0.38	64.68	0.20
20	64.63	0.28	64.69	0.18

Table 1: Pile critical load: influence of the discretization.

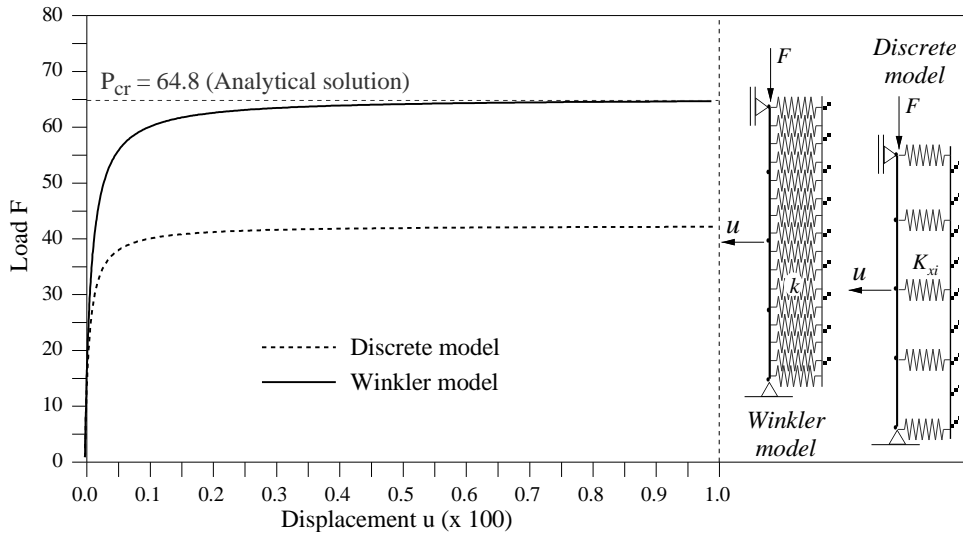


Figure 7: Nonlinear equilibrium paths of pile - discrete and continuum models.

Table 2 presents the results in terms of pile critical load and mode. It can be observed that for $\beta_w = 16$, the critical mode obtained was $n = 2$ and the critical load was $P_{cr} = 78.51$. For $\beta_w = 48$, the critical mode obtained was $n = 3$ and the critical load $P_{cr} = 141.41$. These results show how important initial imperfections and their shapes are regarding stability analysis of piles under contact constraints.

Semi-wave number	$\beta_w = 16$	Error (%)	$\beta_w = 48$	Error (%)
1	167.11	0.49%	480.47	1.15%
2	78.51	0.61%	157.68	0.54%
3	107.03	0.60%	141.41	0.23%
4	167.39	0.24%	188	0.17%

Table 2: Pile critical load and mode.

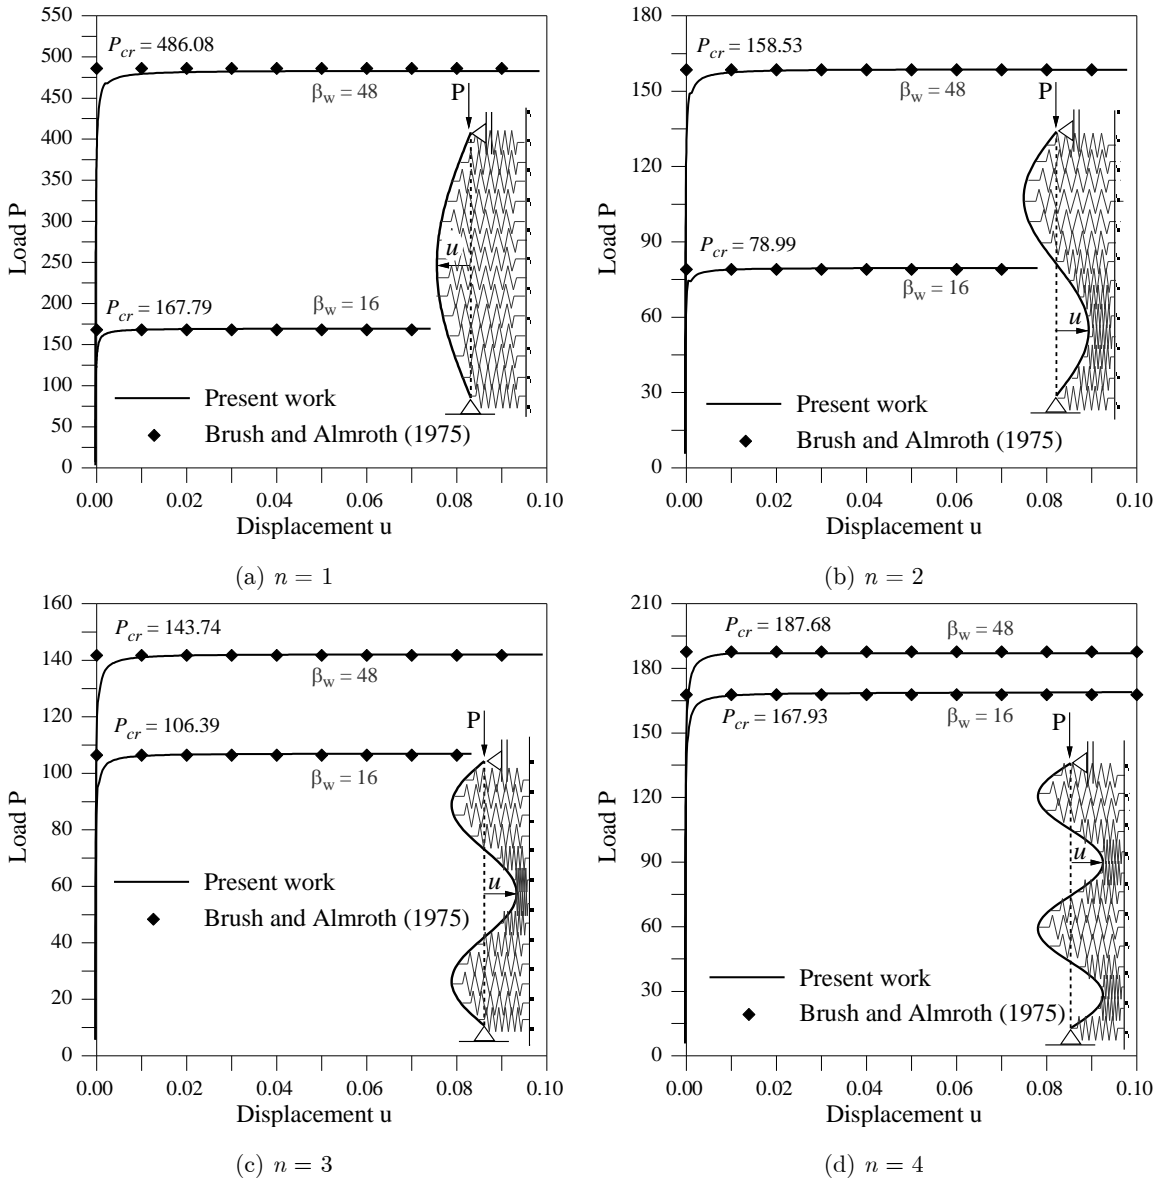


Figure 8: Nonlinear equilibrium paths of pile – Winkler type foundation.

5.3 Piles under Contact Constraint Imposed by a Pasternak Type Foundation

Finite element solutions of piles, with different end conditions, and under bilateral contact constraints of the Pasternak type (Figure 9) were initially presented by Naidu and Rao (1995). Kien (2004) and Shen (2011) also presented the buckling loads for the particular case of the pinned pile with bilateral constraints imposed by Winkler- and Pasternak-type foundations.

These references are then used to validate the stability analyses carried out using the proposed numerical methodology, where for all piles the following were considered: 20 finite elements,

$L = 31.4$, $EI = 10$, and the dimensionless stiffness parameters of elastic base $\beta_1 = kL^4/(EI)$ and $\beta_2 = kGL^2/(\pi^2 EI)$.

The nonlinear equilibrium paths for these analyses are presented in Figs. 8a-c, in terms of the dimensionless pile load ω ($= PL^2/EI$) considering four combinations of dimensionless parameters β_1 and β_2 : ($\beta_1 = 1$; $\beta_2 = 0$); ($\beta_1 = 100$; $\beta_2 = 0$); ($\beta_1 = 100$; $\beta_2 = 0.5$); and ($\beta_1 = 100$; $\beta_2 = 2.5$). The figures reveal the good agreement between the results obtained in this article with those of literature. Tables 3-5 present the dimensionless pile critical load ω_{cr} for different combination of the β_1 and β_2 stiffness parameter, different end conditions, and different authors.

For the combination of β_1 and β_2 : (0; 0), which represents the classical column stability problems (without contact constraints), note (Table 3-5) that the values obtained for the dimensionless critical load ω_{cr} through the present work, as well as in the literature, are quite close to those of the analytical solution for the three columns, namely: 2.4674, 9.8696, and 39.4784.

For the β_2 parameter equaling zero, combinations (1; 0) and (100; 0), the Pasternak models are reduced to Winker models. In this situation, for pinned pile, Brush and Almoth (1975) obtained the following values of the dimensionless critical load, ω_{cr} : 9.9681 and 20.0051. The values found through the present work for ω_{cr} show good agreement with those from the literature.


For the elastic foundation represented by the Pasternak model and combination β_1 and β_2 , (100; 2.5), the following values of the ratio ω_{cr} (Pasternak)/ ω_{cr} (without contact) were obtained for the three piles: 14.8, 4.5, and 1.8. Thus, the fixed-free pile was more sensitive to additional stiffness provided by the Pasternak elastic foundation. Good agreement can also be observed between the results of the present paper and those found in the literature.

6 CONCLUSIONS


This article evaluated the equilibrium and stability of piles under bilateral contact constraints imposed by a geological medium. The numerical strategy proposed for solving the geometric nonlinear problem was based on the finite element method and the Newton-Raphson method and the generalized displacement approach. The examples presented above validate the computational implementations.

Basically, the nonlinear analyses carried out had as objectives: to evaluate the critical load of piles with a discrete elastic intermediate support; to evaluate the imperfection (unstable modes) influence in the assessment of piles critical loads in contact with a Winkler-type foundation; and verify the influence on the stiffness system when considering the elastic base second parameter, i.e., by adopting the Pasternak model in representation of the soil. The nonlinear results presented have made it possible to establish some general conclusions that are summarized below:


i. the higher the pile's critical buckling load—in which sideways movement is constrained by a single elastic spring support—the higher the value of elastic spring stiffness that acts as a rigid support and, consequently, the geometric condition, specific to each case, changes the buckling mode;

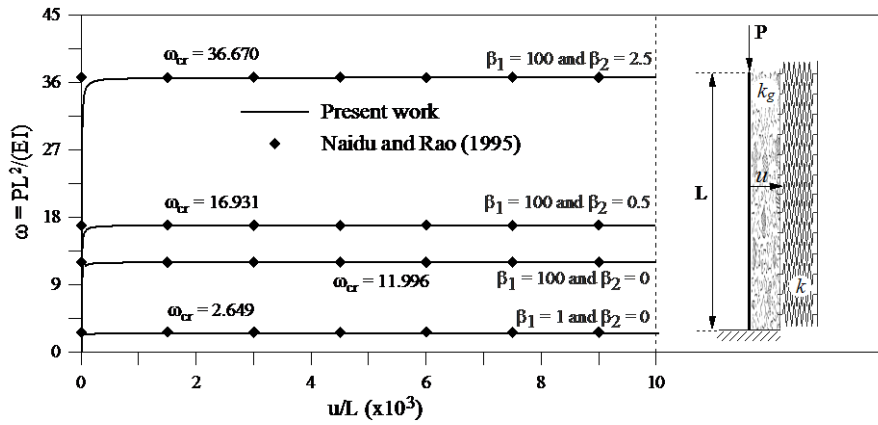

(a) Fixed-free pile.

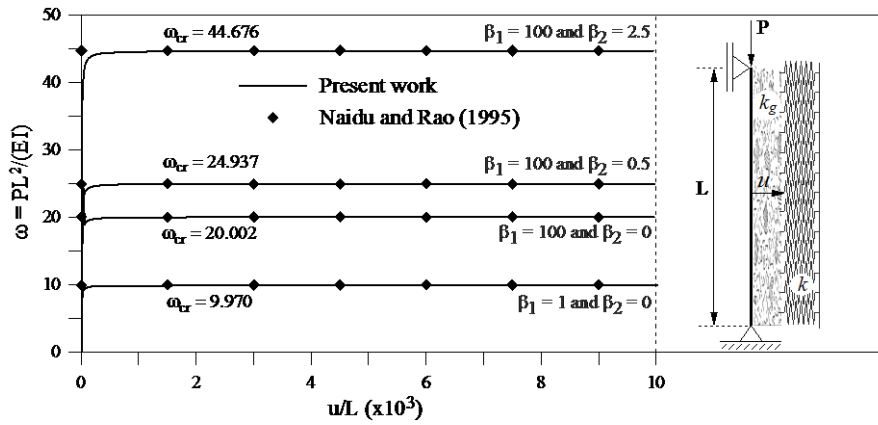

(b) Pinned pile.

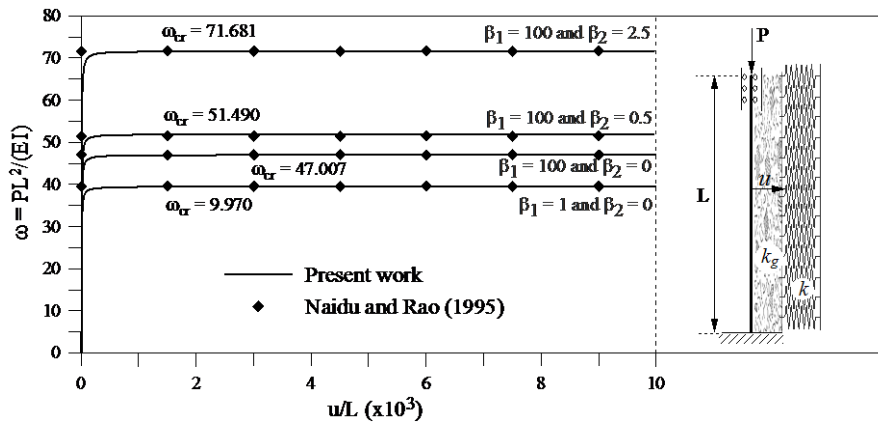

(c) Fixed pile.

Figure 9: Nonlinear equilibrium paths - Pasternak-type foundation.

$(\beta_1; \beta_2)$	Naidu and Rao (1995)	Present work
(0; 0)	2.4674	2.4629
(1; 0)	2.6499	2.6450
(100; 0)	11.996	11.972
(100; 0.5)	16.931	16.891
(100; 2.5)	36.670	36.569

Table 3 Fixed-free pile: dimensionless critical load ω_{cr} .

$(\beta_1; \beta_2)$	Kien (2004)	Naidu and Rao (1995)	Shen (2011)	Present work
(0; 0)	9.9023	9.8696	9.8696	9.8556
(1; 0)	10.0034	9.9709	9.9709	9.9566
(100; 0)	20.0095	20.002	20.0017	19.950
(100; 0.5)	24.9331	24.937	24.9365	24.8787
(100; 2.5)	44.4883	44.676	44.6757	44.5922

Table 4 Pinned pile: dimensionless critical load ω_{cr} .

$(\beta_1; \beta_2)$	Naidu and Rao (1995)	Present work
(0; 0)	39.479	39.374
(1; 0)	39.555	39.449
(100; 0)	47.007	46.887
(100; 0.5)	51.492	51.804
(100; 2.5)	71.681	71.471

Table 5 Fixed pile: dimensionless critical load ω_{cr} .

- ii. to analyze the pile’s instability with continuum bilateral contact constraint imposed by an elastic foundation, initial imperfections, together with the mathematical model used to represent the foundation, has great influence in determining the pile’s critical load;
- iii. the numerical formulation presented in this work was able to define with precision the pile’s critical load as well as the post-critical response;
- iv. when adopting the Pasternak model to represent the soil, the higher the pile’s critical buckling load, the smaller the influence of the model’s second parameter.

Acknowledgments

The authors wish to express their gratitude to CAPES, CNPq and FAPEMIG (federal and state agencies), for the support received in the development of this research. Special thanks go to prof. John White for the editorial review of this text.

References

- Jones, N. (2011). *Structural Impact*, Cambridge University Press.
- Jones, N., Wierzbicki, T., (1987). Dynamic plastic failure of a free-free beam. *International Journal of Impact Engineering* 6:240–255.
- MIL A-83444 (USAF) (1974). *Military Specification – Aircraft Damage Tolerance Requirements*.
- Molent, L., Sun, Q., Green, A. (2006). Characterization of equivalent initial flaw sizes in 7050 aluminium alloy, *J. Fatigue Fracture Engineering Material Structures* 29: 916-37.
- Montgomery, D.C. and Runger, G.C., (1999). *Applied statistics and probability for engineers*, John Wiley Sons (New York).
- Oshiro, R. (2010). *Scaling of impacted structures*, Ph.D. Thesis (in Portuguese), University of Sao Paulo, Brazil.
- Ai, Z.Y. and Han, J. (2009). Boundary element analysis of axially loaded piles embedded in a multi-layered soil. *Computers and Geotechnics*, 36: 427-434.
- Ai, Z.Y. and Yue, Z.Q. (2009). Elastic analysis of axially loaded single pile in multilayered soils. *International Journal of Engineering Science*, 47: 1079-1088.
- Aljanabi, A.I.M., Farid, B.J.M., Mohamad, Ali A.A.A. (1990). The interaction of plane frames with elastic foundation having normal and shear moduli of subgrade reactions. *Computers and Structures*; 36(6): 1047-1056.
- Alves, R.V. (1995). *Non-linear elastic instability of space frames*. D.Sc. thesis, Federal University of Rio de Janeiro, UFRJ-COPPE (in Portuguese).
- Badie, S.S. and Salmon, D.C. (1996). A quadratic order elastic foundation finite element. *Computers & Structures* 1996; 58(3): 435–443.
- Bathe, K.J. (1996). *Finite Element Procedures*. Prentice-Hall: New Jersey.
- Brush, D.O. and Almroth, B.O. (1975). *Buckling of Bars, Plates and Shell*. Mac Graw-Hill.
- Budkowska, B.B. (1997a). Sensitivity analysis of short piles embedded in homogeneous soil. Part I (theoretical formulation). *Computers and Geotechnics*; 21(2): 87-101.
- Budkowska, B.B. (1997b). Sensitivity analysis of short piles embedded in homogeneous soil. Part II (numerical investigations). *Computers and Geotechnics*; 21(2): 103-119.
- Budkowska, B.B. and Szymczak, C. (1997). Initial post-buckling behavior of piles partially embedded in soil. *Computers & Structures*; 62(5): 831-835.
- Celep, Z., Güler, G., Demir F. (2011). Response of a completely free beam on a tensionless Pasternak foundation subjected to dynamic load. *Structural Engineering and Mechanics*; 37(1): 61-77.
- Chai, H. (1998). The post-buckling response of a bi-laterally constrained column. *J. Mech. Phys. Solids*; 46(7): 1155-1181.
- Challamel, N. (2011). On the post-buckling of elastic beams on gradient foundation. *Comptes Rendus Mécanique*; 339(6): 396-405.
- Chen, G. and Baker, G. (2003). Rayleigh–Ritz analysis for localized buckling of a strut on a softening foundation by Hermite functions. *International Journal of Solids and Structures*; 40(26): 7463-7474.

- Cheung, Y.K. (1977). Beams, slabs, and pavements. In *Numerical Methods in Geotechnical Engineering*, ed. by C S Desai, JT Christian. McGraw-Hill: New York: 176-210.
- Crisfield, M.A. (1991). *Non-linear Finite Element Analysis of Solids and Structures*. Vol. 1. John Wiley and Sons Inc.: USA.
- Dash, S.R., Bhattacharya, S., Blakeborough, A. (2010). Bending–buckling interaction as a failure mechanism of piles in liquefiable soils. *Soil Dynamics and Earthquake Engineering*; 30(1-2): 32-39.
- Dutta, S.C., Roy, R. (2002). A critical review on idealization and modeling for interaction among soil-foundation-structure system. *Computers and Structures* 2002; 80: 1579-1594.
- Fazelzadeh, S.A. and Kazemi-Lari, M.A. (2013). Stability analysis of partially loaded Leipholz column carrying a lumped mass and resting on elastic foundation. *Journal of Sound and Vibration*; 332: 595-607.
- Hetényi, M. (1946). *Beams on Elastic Foundation*. University of Michigan Press: Michigan.
- Holanda, A.S. and Gonçalves, PB. (2003). Post-buckling analysis of plates resting on a tensionless elastic foundation. *Journal of Engineering Mechanics (ASCE)*; 129(4):438-448.
- Horibe, T. and Asano, N. (2001). Large deflection analysis of beams on two-parameter elastic foundation using the boundary integral equation method. *JSME International Journal*; 44(2), 231-236.
- Kausel, E. (2010). Early history of soil-structure interaction. *Soil Dynamics and Earthquake Engineering*; 30: 822-832.
- Kerr, A.D. (1964). Elastic and viscoelastic foundation models. *Journal of Applied Mechanics(ASME)*; 31:491-498.
- Kien, N.D. (2004). Postbuckling behavior of beams on two-parameter elastic foundation. *International Journal of Structural Stability and Dynamics* 2004; 4(1): 21-43.
- Limkatanyu, S. and Spacone, E. (2006). Frame element with lateral deformable supports: formulations and numerical validation. *Computers and Structures*; 84(13-14): 942-954.
- Limkatanyu, S. and Spacone, E. (2002). R/C Frame element with bond interfaces. Part I: displacement-based, force-based and mixed formulations. *J Struct Eng, ASCE*; 123(3): 346-355.
- Maciel, F.V. (2012). *Equilibrium and stability of structural elements with bilateral contact constraints imposed by elastic foundations*. M.Sc. dissertation, Federal University of Ouro Preto (UFOP), MG, Brazil (in Portuguese).
- Manna, B. and Baidya, D.K. (2010). Dynamic nonlinear response of pile foundations under vertical vibration — Theory versus experiment. *Soil Dynamics and Earthquake Engineering*; 30(6): 456-469.
- Matos Filho, R., Mendonça, A.V., Paiva, J.B. (2005). Static boundary element analysis of piles submitted to horizontal and vertical loads. *Engineering Analysis with Boundary Elements*; 29: 195-203.
- Mullapudi, R. and Ayoub, A. (2009). Nonlinear finite element modeling of beams on two-parameter foundations. *Computers and Geotechnics*; 37: 334-342.
- Naidu, N.R. and Rao GV. (1995). Stability behaviour of uniform columns on a class of two parameter elastic foundation. *Computers and Structures* 1995; 57(3): 551-553.
- Roy, R., Dutta, S.C. (2010). Inelastic seismic demand of low-rise buildings with soil-flexibility. *International Journal of Non-Linear Mechanics* 2010; 45(4): 419-432.
- Sapountzakis, E.J., Kampitsis, A.E. (2010). Nonlinear analysis of shear deformable beam-columns partially supported on tensionless Winkler foundation, *International Journal of Engineering, Science and Technology*; 2(4): 31-53.
- Selvadurai, A.P.S. (1979). *Elastic Analysis of Soil-Foundation Interaction*. Elsevier Scientific Pub. Co..
- Shen, H-S. (2011) A novel technique for nonlinear analysis of beams on two-parameter elastic foundations. *Int. Journal of Struc. Stability and Dynamics*; 11(6): 999-1014.
- Shen, H-S. (2009). Postbuckling of shear deformable FGM cylindrical shells surrounded by an elastic medium. *International Journal of Mechanical Sciences*; 51(5): 372–383.

- Shirima, L.M. and Giger M.W. (1992) Timoshenko beam element resting on two-parameter elastic foundation. *ASCE J. Eng Mech.*; 118(2): 280–295.
- Silva, A.R.D. (1998). Analysis of plates under unilateral contact constraints. M.Sc. dissertation, Federal University of Ouro Preto, MG, Brazil (in Portuguese).
- Silva, A.R.D. (2009). Computational system for static and dynamic advanced analysis of steel frames. D.Sc. thesis, Federal University of Ouro Preto, MG, Brazil (in Portuguese).
- Silva, A.R.D., Silveira, R.A.M., Gonçalves, P.B. (2001). Numerical methods for analysis of plates on tensionless elastic foundations. *International Journal of Solids and Structures*; 38(10-13):2083-2100.
- Silveira, R.A.M. (1995). Analysis of slender structural elements under unilateral contact constraints. D.Sc. thesis, Pontifícia Universidade Católica do Rio de Janeiro, PUC-Rio (in Portuguese).
- Silveira, R.A.M., Nogueira, C.L., Gonçalves, P.B. (2013). A numerical approach for stability analysis of slender arches and rings under contact constraints. *International Journal of Solids and Structures*; 50(1):147-159.
- Silveira, R.A.M., Pereira, W.L.A., Gonçalves, P.B. (2008). Nonlinear analysis of structural elements under unilateral contact constraints by a Ritz type approach. *International Journal of Solids and Structures*; 45(9):2629-2650.
- Simitsep, G.J. and Hodges, D.H. (2006). *Fundamentals of Structural Stability*, Elsevier: New York.
- Sironic, L., Murray, N.W., Grzebieta R.H. (1999). Buckling of wide struts/plates resting on isotropic foundations. *Thin-Walled Structures*; 35(3): 153-166.
- Sofiyev, A.H. (2011). Influences of elastic foundations and boundary conditions on the buckling of laminated shell structures subjected to combined loads. *Composite Structures*; 93(8): 2126-2134.
- Stein, E. and Wriggers, P. (1984). Stability of rods with unilateral constraints, a finite element solution. *Computers and Structures*; 19(1-2): 205-211.
- Tsudik, E. (2013). *Analysis of Structures on Elastic Foundations*. J. Ross Publishing, USA.
- Tzaros, K.A. and Mistakidis, E.S. (2011). The unilateral contact buckling problem of continuous beams in the presence of initial geometric imperfections: an analytical approach based on the theory of elastic stability. *International Journal of Non-Linear Mechanics*; 46(9): 1265-1274.
- Wang, Y.H., Tham, L.G., Cheung, Y.K. (2005). Beams and plates on elastic foundations: a review. *Progress in Structural Engineering and Materials*; 7(4): 174-182.
- Yang, Y.B. and Kuo, S.B. (1994). *Theory & Analysis of Nonlinear Framed Structures*. Prentice Hall: Englewood Cliffs, New Jersey.
- Yu, J., Zhang, C., Huang, M. (2013). Soil-pipe interaction due to tunneling: assessment of Winkler modulus for underground pipelines. *Computers and Geotechnics*; 50: 17-28
- Wang, Y.H., Tham, L.G., Cheung, Y.K. (2005). Beams and plates on elastic foundations: a review. *Progress in Structural Engineering and Materials*; 7(4):174-182.
- Weitsman, Y. (1970). On foundations that react in compression only. *Journal of Applied Mechanics*; 37: 1019-1030.
- West, R.P., Heelis, M.E., Pavlovic, M.N., Wylie, G.B. (1997). Stability of end-bearing piles in a non-homogeneous elastic foundation. *International Journal for Numerical and Analytical Methods in Geomechanics*; 21: 845-861.