

A model for the displacement behavior of after buckled membranes and textiles based on tension field theory and experiments

Aura Conci*

Fluminense Federal University – Pos Graduation in Mechanical Engineering Program,
UFF - PGMEC, RJ – Brazil

Abstract

This paper presents a study on the use of the tension field theory for efficient representation of textiles. A highly buckled membrane model provides the simplest approach for visualization of vertical fabrics. The differential equation of tension lines gives the outline of the wrinkles. An equation system is presented, which, when iteratively solved supplies the basic variables of realistic fabric displacements: the number and positions of wrinkles, and the wrinkle depth. The model can also represent important physical characteristics of textiles, as malleability, elasticity and weight. However the tension field theory does not attempt to describe the field of displacements normal to the membrane surface, which are the main point of the work here presented. Experimental measures have been developed as a way to verify the adequacy of the equations and to subsidize empirical propositions for improvement of the model. How to use this approach for textile visualization is the objective of this work. Although the original theory is complex, the resulting algorithm is simpler and faster than many numerical treatments already used for prediction of the cloth aspect. The idea is to find a simple realistic model that turns possible the addition in the displacement field of other important necessities of the fashion industry like animations and textures.

Keywords: tension field, theory of membranes, wrinkle lines, fabric displacements, post-buckling behavior, deformation of textiles.

1 Introduction

Realistic visualization of fabric has been the subject of researches because it is essential in computer-aided apparel design and fashion industry [8, 10, 16, 22, 24]. The main difficulty in realistic simulation of cloth is that its surface tends to look artificial in usual representation [2, 11]. For modeling the way in which a cloth hangs, folds and wrinkles must be represented, as well as cloth's physical properties such as composition, rigidity, elasticity and yarn structure [3, 12, 13, 17]. These characteristics distinguish a fabric from other materials. Moreover, they are associated with the aesthetic aspect of the garments.

*Corresp. author email: conci.aura@gmail.com

Received 31 Dec 2006; In revised form 13 Sep 2007

Nomenclature

a_o	maximum height of the first wrinkle
a_i	amplitude of the wrinkle i
a_n	amplitude of the upper wrinkle line
c	constant describing the load condition
E	material Young's modulus
F	tension force in the horizontal direction
h	textile height
i	wrinkle line of order i
l	distance between textile supports (figure 3)
L	initial length
L'	approximation of textile length
n	number of wrinkles
t	textile thickness
w	textile weight per area
W	textile total weight
y_o	vertical position of the first wrinkle line
y_n	vertical position of the upper wrinkle line
x, y, z	fabric coordinates
z_{max}	maximum displacement in z direction (normal to the xy plane) or z value for $x = 0$
ν	Poisson's ratio
σ_{cr}	compressive critical stress

The task of realistic visualization of cloth is much more difficult than a representation of its surface texture and has been considered usually by complex approaches [16]. Attempts to use finite element analysis and high-level mathematical techniques to model textiles demand vast computer power and yet still do not produce faithfully simulations of fabrics [9]. An experimental evaluation must be considered to maintain the aesthetic aspect. When fabrics are modeled as a physical object, even a single piece draping on an object (like linings and curtains) may need a great amount of calculations [3]. The scale of the problem increases when fabric properties (elasticity, weight, etc.) must be taken into account and increase more when the problem moves from modeling only the appearance to experimental comparison of results. Computer model of fabrics has achieved a certain success (in computer graphics) but it has yet space to combine reality with mathematical models for an efficient graphical representation [2, 10, 16, 18, 22, 24]. This work analyzes the use of the tension field theory combined with experimental measurements for fabric representation. This combination characterizes textile details in macro scale without the huge amount of computation necessary to micro scale representation, as approaches based on fibers or threads do.

2 Previous visualization works

Despite the importance of garment in human images, relatively little studies have been reported on generating realistic textile and fabric images. Attempts to this include application of continuum mechanic and finite element methods, as well as energy models, even though proper solutions are not yet available.

Feynman [10] used a thin plate model to approximate square pieces of cloth, isolated from other cloth, which is simulated by minimizing its energy. The cloth is approximating as a grid of points. Gravity is assumed to be the only external force. By moving each of the grid points in turn toward a position that decreases the energy of the whole cloth, it will be moved toward a configuration of minimum energy (relaxation).

Weil [24] described three different methods to produce cloth details at three different scales. The largest scale features are created by catenaries construction that creates initial positions for a grid of points. These points are then relaxed to create plausible representation on an intermediate scale. The relaxation stage does not explicitly involve the use of energy. Cubic splines interpolation is used in the final stage.

Terzopoulos *et al.* [22] developed an approach for modeling flexible materials, based on elasticity theory. This approach can model a wide range of deformable objects, including rubber, cloth and paper. The simulation involves numerically solving the partial differential equations that govern the motion of the deformable shape through space. They employed in strain energy formulation the resistance for stretching, bending and twisting. However, their formulation discards nonlinear terms of strain corresponding to bucking. Thus, wrinkles and drapes in cloth supported at points are not simulated.

Carignan *et al.* [2] presented an approach, where cloth pieces are first designed with polygonal panels in two dimensions and then seamed and attached to the model's body in three dimensions. After, physical properties are simulated and then clothes are animated according to the actor's motion in a physical environment. They described the physical model used and address several problems they encountered. How to constrain the elements of deformable objects which are either seamed together or attached to rigid moving objects is commented. They also discuss how to reduce the number of parameters for improving the interface. Although the final appearance is very dull, they try to make clothes look more realistic, incorporating, various textures, buttons, belts and other decorations.

Chen and Govindaraj [3] used the finite element method and treated fabrics as an orthotropic medium. Their inputs to the model are Young's modulus, shear modulus and Poisson's ratio. Doubly curved shell element with five degrees of freedom per node is used in their simulation. For large displacement deformation problems the nonlinearity due to a change in the geometry of the body has to be considered. The nonlinear problem is usually solved iteratively, which makes the calculation to reach high level.

Platt and Barr [18] use mathematical constraint methods based on physics and on optimization theory to create a flexible model that uses finite elements. A great deal of materials, such

as sponge, gelatin, taffy, putty, moldable plastic and elastic materials can be simulated.

The approach presented by Segenreich and Conci [21] are complementary to models proposed by Terzopoulos *et al.* [22], Platt and Barr [18] and Carignan *et al.* [2], as well as with the catenaries based [24] and pre-buckling approaches [10]. It represents vertically suspended pieces of cloth in deformation much after the point of buckling (post-buckling conditions) [1, 12]. The model here presented complements such approaches [7, 21] including the out of plane displacement on these representations which is essential for representation on virtual human animations [2, 11, 16]. Moreover, differently from all mentioned works on generating realistic textile visualization, comparisons with real cloths are presented to show the degree of realism achieved by the formulation and algorithm presented.

3 Basic considerations

Observing the fabrics we see that the textile structure can be considered as a membrane. Fabric folds are produced by gravity when only part of the cloth is directly supported. The lines of strain presented on buckled membrane or highly thin plate are referred to as wrinkle lines [15], and they represent the folds and the crinkles in fabrics [17]. The relationship between the membrane surface and the load direction is very important in the mechanical behavior [12]. There is no external loading in many applications of textiles and the weight acts everywhere in vertical direction (due to the Earth gravity). Fabrics undergo large displacements for small applied forces. Their displacement properties depend on the textile surface direction. We shall distinguish between two essential kinds of behavior on these structures:

(1) Normal load - a textile with loads applied in direction normal or perpendicular to its initial plane (typical examples of this first type of behavior are a carpet falling on the floor, a waving weightless flag, or a cloth being lifted from a flat surface); and

(2) In plane load - a textile which carry loads in the same directions of its plane (typical examples of this second type of behavior are vertical suspended blankets, curtains or a dress on a mannequin and other fashion applications,).

The effect of gravity is generally the main load on a fabric. Therefore in great number of representation of fabrics the first kind of behavior represents fabrics with initial planes in horizontal direction. In this case a satisfactory approximate theory of membrane bending by normal loads can be used with great realism and small complexity [6]. If the initial plane of the textile to be represented is mainly vertical, it corresponds to the second kind above (almost all the applications for fashion design), and the approach will have to account for the buckling of the membrane. Buckling behavior in all structures (bars, beams, membranes, plates or shells) is much more complex than bending [1]. This paper presents equations for simple and fast representation of the way in which a vertical cloth will fold (second kind of behavior) and compares the results obtained from these equations with real cloth behavior.

4 Tension field theory

The tension field theory (conceived by Wagner [23]) describes the highly wrinkled state of membranes subjected to displacements well in excess of that necessary to initiate buckling. The assumption of zero flexural membrane stiffness on post-buckling and wrinkles at right angles to the lines of tension characterizes this theory. Mansfield [15] considers an initially flat membrane of arbitrary shape and variable stiffness, under self-weight supported in a vertical plane. Slack in the membrane manifests itself in the formation of wrinkle lines whose determination is the prime objective.

The tension field theory was conceived as a theory of wrinkling isotropic elastic membranes, but the basic assumptions do not depend on isotropy or elasticity [17]. The membrane may have anisotropy related to the weave and nonlinear elastic properties [14]. Pipkin's derivation [17] takes into account that there is resistance to changes in the angle between the weft and warp directions in fabrics. However the theory does not attempt to describe the field of displacements normal to the membrane surface, which are the main point of the work here presented. Rimrott and Ma [20] use this theory to prevent wrinkles in substratum of solar panels. They simulated, in laboratory, blankets with in-plane loading and their experiments showed that the number of wrinkles was a function of the critical stress that the material withstand. Theory and experiment are compared with good agreement [20]. However, like the other works using tension field the description of the 3D wrinkled displacement is not considered. This displacement is much important for realistic visualization of textiles and related to the out-of-plane displacements engendered by the buckling action of the compressive stresses [14]. Strictly speaking such relations are nonlinear and their exact analysis presents formidable difficulties. Fortunately, textiles can easily be experimented in laboratory and their out-of-plane displacements can be measured to improve assumptions to derive the 3D equations [21].

4.1 The wrinkle model from tension field assumptions

A distinctive property of textile materials is their extremely low compressive stiffness. A general assumption is that a textile cannot support any compressive stress. For the case when the vertical membrane is suspended by fixed points, the wrinkle lines have to pass through these fixed points in order to satisfy equilibrium conditions [15], whose solution will depend on the boundary condition of each problem. From equilibrium conditions Mansfield [15] developed wrinkle lines equations for membranes (supported at points or edge-supported) with different boundary: cosine, parallelogram, triangular, pennant-shaped and wedge-shaped (see figure 1). Mansfield shows the wrinkle line equations occur in a repetitive sequence in case of strip supported at intervals (figure 2). The case of inclined supports was also considered and demonstrated that the pattern of wrinkle lines is obtained from the previous case by a simple shearing process (as the parallelogram on figure 1 that is derived from rectangular shape).

The simplest wrinkle line solution [15] is given by

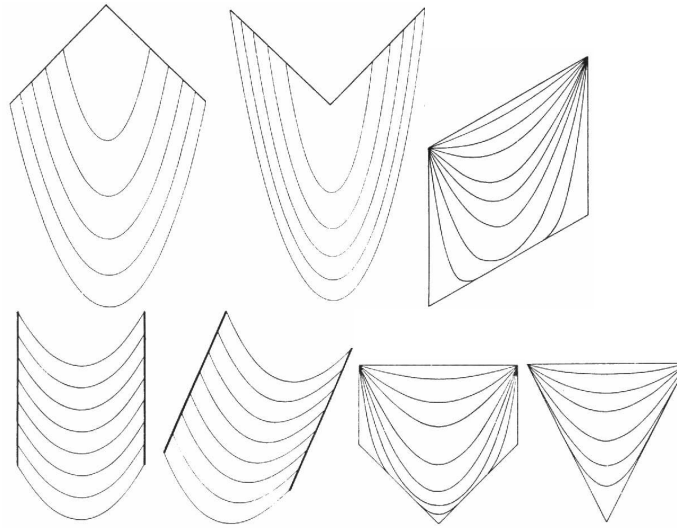


Figure 1: 2D wrinkle lines for various shapes and support conditions from tension field theory.

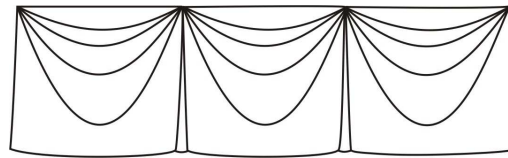


Figure 2: Repetitive folds in case of fabric strip supported at intervals.

$$y = a_o e^k \cos(\pi x/l) \quad (1)$$

where a_o represents the maximum height of the first wrinkle (amplitude of cosine curve), l is the distance between fixed points or supports (figure 3), and

$$k = -(\pi^2 F)/(l^2 w) \quad (2)$$

where w is the textile weight per area (textile total weight, W , divided by the area of its surface) and F is the tension in the horizontal direction. This solution is exact for cosine-shaped textiles, that is when the lower boundary (first wrinkle line) is given by

$$y_o = a_o \cos(\pi x/l)$$

and the upper boundary (upper wrinkle line) is given by

$$y_n = a_n \cos(\pi x/l) \quad (3)$$

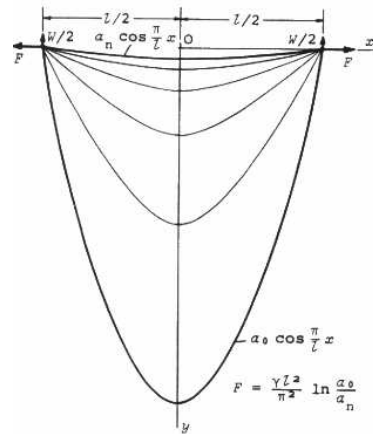


Figure 3: Cosine membrane and its wrinkle characteristics used.

In the limiting case we have $a_n = 0$, which corresponds to a straight upper boundary. Note that F is zero on y_0 , which agrees with equilibrium requirement of free stress lower boundary. When $a_n \rightarrow 0$ the horizontal component F grows to infinity.

Observing the behavior of actual suspended fabric it is possible to see that a finite number of wrinkles will be developed [21]. The amplitude of the wrinkles is strongly dependent on the horizontal motion of the supports but this is not the case for the number of wrinkles [19]. In experiments this number are also not dependent of warp directions [7]. We have investigated carefully this problem because most of fabrics have anisotropy, but all results related with the wrinkles position and shape show no direction dependence [7]. A more important observation is that there is no randomness in the fold shapes [4, 7, 13, 19–21]. In steady state, repetitions of experiments using the same initial conditions always agree with this observation [5, 21].

5 Simulating 3D wrinkles

The tension field theory [14] considers only the 2D locus of the fabric folds (figure 1). Even if complicated types of crinkle are considered, as those treated by Pipkin [17] of two intersected families of fold lines or double folds, the wrinkle description is purely on plane. Of course the number of folds and their locus is the main aspect of the cloth representation. However, folds must be 3D in realistic textile visualization. Strictly speaking such problems are nonlinear and their exact analysis presents formidable difficulties [14]. Fortunately, textiles can easily be experimented in laboratory and their out-of-plane displacements can be studied to improve assumptions to derive the 3D equations [21]. To aid displacement descriptions, experiments have been organized with fabrics of different materials and several shapes [7].

Experiences have been conducted comparing cosine with others types of boundaries and

the results showed that the wrinkle pattern is visually identical until the bottom wrinkle [19]. Quadrilateral boundaries were the case with worse results. Figure 4 shows the drawings in real cloth of the wrinkled prevision. These cloths have rectangular boundary and cosine shapes. Both drawings are obtained from considering the cosine expressions of the last section. The only position where the prevision and the real folds visually do not match (see figure 4) is for the rectangular shape on the wrinkle whose amplitude goes through the bottom boundary. But locus and shapes can be considered correctly described for textile computer graphics representation. These experiences indicated that the use of the 3D cosine boundary developed expressions is also adequate for other shapes [21]. The same happens with the assumption of the normal displacement. The displacement in z direction (normal to the xy plane of figure 3) varies linearly on any strip folded between a + or - direction, with maximum value for $x = 0$. The z component of the wrinkle line of order i can be represented

$$z_i = z_{max} \cos(\pi x) / l \quad (4)$$

Then, the fabric representation can be performed in three steps: (1) grid generation; (2) determination of the elements related to the folds; and (3) the grid displacement and its combination with other displacements (figure 5) and rendering techniques (but this is out of the scope of this work).

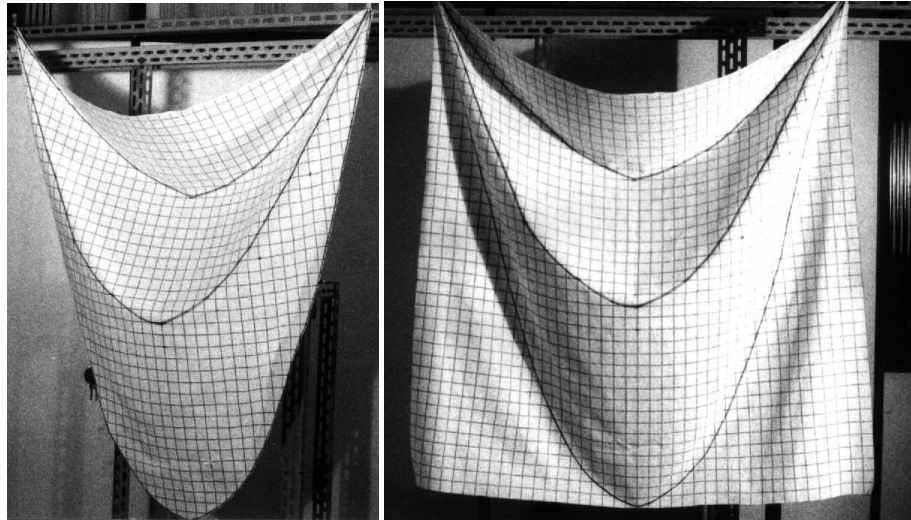


Figure 4: The same fold prevision from the proposed approaches is drawn on the real textiles. For these figures $h = L = 140$ cm, $t = 0.4$ mm. Material presents $E = 40$ MPa, $w = 17.7 \times 10^{-7}$ N/mm². The calculated values are $n = 4$, $Q = 0.6$ and $z_{max} = 7$ cm.

5.1 First step: grid generation

This step represents the cloth modeled as a grid of three-dimensional coordinates. By increasing the density of the grid, greater resolution of the surface model may be obtained. A distinction must be made between free points and restricted points on the grid. The restricted points are those that fix a piece of fabric, their coordinates will not change. The remaining points are considered as free points, they will move with textile folds and their new position must be computed. The grid is treated as a coordinate system that describes the garment shape before the appearance of folds. Each grid point should be corresponded with a fabric point on x, y and z axes.

5.2 Second step: determination of fold positions

To determine the displacement of each point when the textile is suspended and the folds appear, the locus of the wrinkles must be computed. For this some parameters must be calculated. They are the number of wrinkles, n , the amplitude of each wrinkle in vertical direction, a_i , and the maximum component of the wrinkle lines out of the initial plane, z_{max} . The placement of each point of the grid on the folded fabric, which will be determined in the next step, is related to these values.

The process of determining these parameters involves an iterative stage. It has been shown [20] for cosine boundaries (figure 3) that the wrinkle amplitudes grow in geometric progression. Hence, for each wrinkle i , the parameter a_i in equation (3) can be described as

$$a_0/a_1 = a_1/a_2 = \dots = a_{n-1}/a_n = (a_0/a_n)^{1/n} = Q \tag{5}$$

So the vertical position of each fold is:

$$y_i = (a_o/Q^i) \cos (\pi x/l) \tag{6}$$

However, the value of the ratio Q , and the number of wrinkles n are not yet determined. Since the critical stress, σ_{cr} , cannot be exceeded, the number of wrinkles and their amplitudes will adjust themselves. This stress is limited by the buckling stress [1]. The ratio Q can be related to the maximum compressive stress in the cloth [21]:

$$wh(Q-1)^2 / (tQ(Q+1)) \leq \sigma_{cr} = cEt^2 / (l^2(1-\nu^2)) \tag{7}$$

where t is thickness of the cloth, h is its height or its initial maximum on the vertical dimension, c is a constant describing the load condition [1], E is the material Young's modulus and ν its Poisson's ratio.

As a first approach Q can be obtained from (7) by enforcing equality and using the maximum compression stress of thin plates [12]. The unknown n and z_{max} are obtained by fabric inextensibility assumptions [21]. The initial length L and the wrinkled upper boundary length can be related by:

$$L = \int_{-l/2}^{l/2} \sqrt{1 + \left(\frac{dy_n}{dx}\right)^2 + \left(\frac{dz_n}{dx}\right)^2} dx$$

or from (4) to (6)

$$L = \int_{-l/2}^{l/2} \sqrt{1 + \left(\frac{\pi}{l}\right)^2 \left(\frac{a_0^2}{Q^{2n}} + z_{\max}^2\right) \sin^2 \frac{\pi x}{l}} dx \quad (8)$$

The inextensibility of the vertical fibers leads, for $x = 0$, to

$$h = \sum_{i=1}^n \sqrt{(a_{i-1} - a_i)^2 + (2z_{\max})^2}$$

or from (5) and (6)

$$h = \sum_{i=1}^n \sqrt{\frac{a_0^2}{Q^{2(i-1)}} \left(1 - \frac{1}{Q}\right)^2 + (2z_{\max})^2} \quad (9)$$

An approximation of n can be determined by means of the equation (5):

$$n = \text{Int} [\log (a_0/a_n) / \log Q] \quad (10)$$

in which $\text{Int} [\cdot]$ is the integer approximation of $[\cdot]$, because the number of wrinkles must be integer. However, a_0 and a_n are both unknown. They are the amplitudes of the lower and upper boundaries of the folded fabric (figure 3). As a first approximation $a_0 = 1.01h$ and $a_n = 0.01h$ can be used (for practical purposes) beginning the iterative approach. The obvious $a_n = 0$ is out of the question in equation (10) (indetermination). These values are used as an initial approximation. As soon as n and Q become known, the amplitude a_i of each wrinkle line can be obtained from (5). A tentative value must be used for z_{\max} (as $0.01h$) in the equation (8) and (9).

In this work a numerical integration (Simpson) is used to solve equation (8). Note that its result is a first approximation of horizontal textile length, L' , where the real value L is known. The obtained value of L' is tested against the real value and new values of z_{\max} , and n are obtained using above equations, until the convergence of L' to L . The tolerance value of this convergence is more or less arbitrary, depending on the desired accuracy. In every case on the next section 5% is used as tolerance value.

5.3 Third step: Wrinkle line positions and grid displacement

The third step performs a 3D displacement on all points on the surface. After determining of the basic parameters Q , z_{\max} and n , the wrinkles lines and all locations of fold points can be obtained by using equations (3), (4) and (5). Knowing the position of the folds, the 3D visualization of the

deformed grid is straightforward from interpolation between consecutive folds and the surface is ready for projections, shadings, shadows and textures details. Figure 5 shows the results of the deformed grid for membranes with different characteristics (as commented in next section).

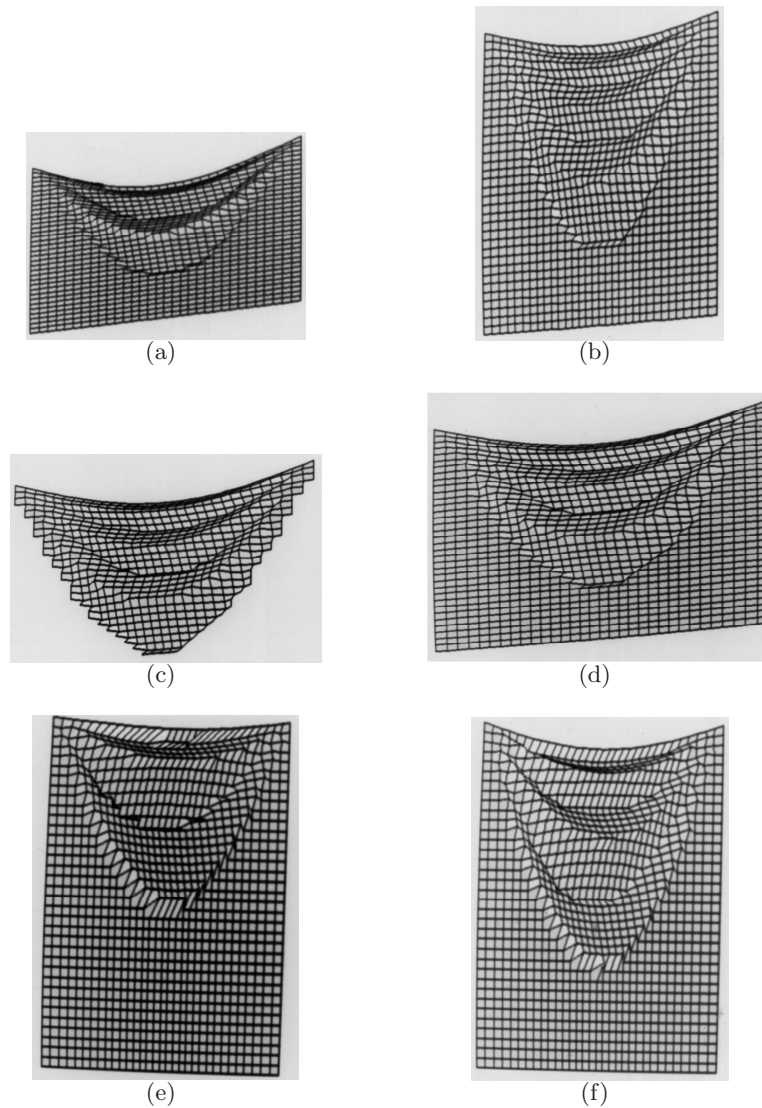


Figure 5: Views of deformed grid obtained with the approach for membranes with the characteristics defined in Table 1 to 4.

6 Results

The elements related to the wrinkle locus and membranes grid appearances are here presented. First, numerical results consider the length influence on wrinkles. To study this, the same textile with increasing length, h , in one direction is used in simulations. The other characteristics were kept and they are $t = 0.25$ mm, $E = 165$ MPa, $w = 15 \times 10^{-7}$ N/mm² and $L = 140$ cm. The support displacement is 10 cm, so $l = 120$ cm (figure 3). Table 1 shows the parameters obtained by the approach for each h . The number of wrinkles increases when the length increases. For rectangular shapes, these results can easily be compared with laboratory experiments. The images on Figure 5(a) and (b) show the obtained result of the approach corresponding to lines 1 and 3 of table 1, respectively.

Figure 5(c) shows views of the wrinkle line positions and grid displacement obtained for fabric with cosine shape. Figure 5(d) presets the obtained result of the approach for the same membrane but with rectangular shape. The other characteristics are $l = 120$ cm, $h = 140$ cm, $w = 17.7 \times 10^{-7}$ N/mm², $E = 140$ MPa, $t = 0.4$ mm, where the obtained results are: $N=7$, $Q = 1.29$ and $z_{max} = 5.15$ cm, for both.

Obtained fold characteristics for textiles with 145×90 cm and increasing weight are shown in Table 2. The other characteristics are $t = 0.35$ mm, $E = 150$ MPa and support displacements of 8.5 cm. These results show that the number of wrinkles increases with the weight. The images on Figure 5(e) and (f) show the obtained result of the approach corresponding to lines 1 and 3 of table 2, respectively.

A series of simulations have been done for textiles with 90×75 cm and increasing thickness, t , as shown in Table 3. The other characteristics for the results (of Table 3) are $w = 12.8 \times 10^{-7}$ N/mm², $E = 185$ MPa, and support displacement of 7 cm. The effect of increasing stiffness is clearly seen.

Some results obtained for textiles with length of 125×85 cm and increasing Young's modulus, E , are shown in Table 4. The other characteristics are $t = 0.23$ mm, $w = 17 \times 10^{-7}$ N/mm² and support displacement of 9 cm. It shows that, when the elasticity increases, the ratio Q increases, but the number of wrinkle decreases.

Table 1: Results for a increasing length.

h (cm)	N	z_{max} (cm)	Q
90	5	5.4	1.31
140	7	4.8	1.29
235	8	6.0	1.34

Table 2: Fabric with increasing weight.

w (10^{-7} N/mm ²)	N	z_{max} (cm)	Q
10	4	5.60	1.78
33	6	4.60	1.46
54	7	4.40	1.39

Table 3: Fabric with increasing thickness.

t (mm)	N	z_{max} (cm)	Q
0.09	7	3.45	1.33
0.26	4	4.15	1.65
0.40	2	1.10	2.60

Table 4: Fabric with increasing elasticity.

E (MPa)	N	z_{max} (cm)	Q
55	8	3.70	1.34
110	7	4.25	1.30
185	6	4.55	1.47

7 Conclusions

An approach that represents the configuration of vertical fabrics punctually supported, draped by gravity has been presented. The tension field theory is used for modeling the fabric behavior. The differential equation of tension lines gives the displacements and the outline of the wrinkles. According to previous investigations and experimental evidence, the wrinkle lines behavior is considered in a sinusoidal way and the depth of the wrinkles are shown to have a geometrical growth. A three-dimensional analysis of the displacements allows to represent the post-wrinkling state (figure 5). An equation system is presented which, iteratively solved, supplies the basic variables of clothes: number of wrinkles, ratio between amplitudes of wrinkles and maximum out of initial membrane plane displacement.

Beside numbers, side by side comparison of real cloth and simulation of the same cloth is a better argument for the visual similarity obtained with the approach. Figures 6 and 7 show the locus of the folds drawn over real cloths. The wrinkle lines behavior is considered in cosine

formulation for both cases (according to the experimental investigations).

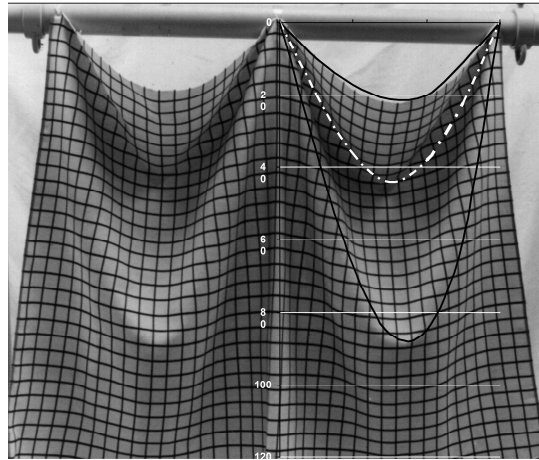


Figure 6: Folds obtained by the approach drawn over a real cloth supported at intervals (the white dashed line represents negative and the black continuous lines represent the positive folds).

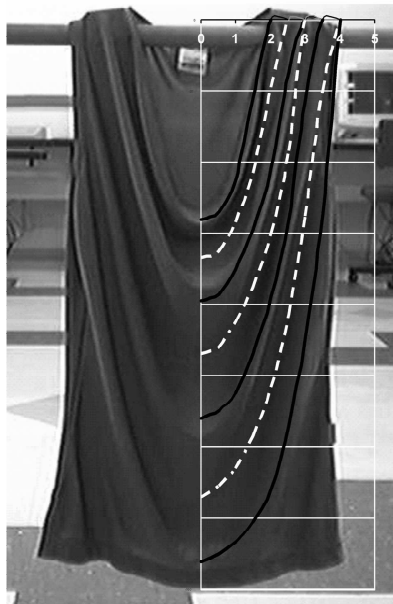


Figure 7: Real shirt original image (left) with composition of the folds obtained by the approach (right), where the displacements normal to the $x y$ plane in negative direction can be identified by the white dashed lines represents and the black continuous lines represent the positive wrinkles.

Results of this approach show that it is possible to represent the fold peculiarities related with textile geometry and physical characteristics. The introduced out-of-plane analysis of the displacements allows to represent the post-wrinkling state. The derived equations provide the basic variables for realistic appearance of clothes: number of wrinkles and their position. The resulting deformed description can be used then with a variety of rendering for realistic textile representation [2, 8, 11].

Acknowledgement: This research was supported in part by CNPq – National Research Council. We would like to thank Andrés Villafuerte Oyola for implementing the first visualization program.

References

- [1] D. D. Brush and B. O. Almroth. *Buckling of Bars, Plates and Shells*. McGraw-Hill, New York, 1975.
- [2] M. Carignan, Ying Yang, N. M. Thalmann, and D. Thalmann. Dressing animated synthetic actors with complex deformable clothes. *ACM SIGGRAPH Computer Graphics*, 26(2):99–104, 1992.
- [3] B. Chen and M. Govindaraj. A physically based model of fabric drape using flexible shell theory. *Textile Research Journal*, 65(6):324–330, 1995.
- [4] C. D. Coman. On the applicability of tension field theory to a wrinkling instability. *Acta Mechanica*, 2007. (to appear) (on line first PDF version): <http://www.springerlink.com.w10033.dotlib.com.br/content/?Author=C.+D.+Coman>.
- [5] C. D. Coman and D. M. Haughton. Localized wrinkling instabilities in radially stretched annular thin films. *Acta Mechanica*, 185(3-4):179–200, 2006.
- [6] A. Conci, F. C. Pereira, and M. F. Bittencourt. Um método para representação dinâmica de membrana sob grandes deslocamentos. In *11th ABCM Mechanical Engineering Conference*, pages 262–264, São Paulo, 1991.
- [7] A. Conci and S. A. Segenreich. On the number of wrinkles in a rectangular membrane. In *Proceedings of II Pan American Congress of Applied Mechanics*, pages 368–371, Vina del Mar, 1991.
- [8] M-L Dai and K. Ozawa. Simulation of worn-out cloth textures by doubly stochastic L-systems. *Image and Vision Computing*, 16:363–371, 1998.
- [9] J. W. Eischen, S. Deng S., and T. G. Clapp. Finite-Element Modeling and control of flexible fabrics parts. *IEEE Computer Graphics and Applications*, 16(5):71–80, 1996.
- [10] C. R. Feynman. Modeling the appearance of cloth. Master’s thesis, Dep. Electrical Eng. and Comp. Science, Massachusetts Inst. of Tech., 1986.
- [11] S. Gray. In virtual fashion. *IEEE Spectrum*, 35(2):18–25, 1998.
- [12] M. Kamruzzaman, A. Umar, S. Q. A. Naqvi, and N. A. Siddiqui. Effect of composite type and its configuration on buckling strength of thin laminated composite plates. *Latin American Journal of Solids and Structures*, 3:279–299, 2006.

-
- [13] A. Libai and D. Givoli. Analysis of pulled axi symmetric membranes with wrinkling. *International Journal of Solids and Structures*, 39(5):1259–1274, 2002.
- [14] E. W. Mansfield. Analysis of wrinkled membranes with anisotropy and nonlinear elastic properties. In *Proceedings of Royal Society*, volume A 353, pages 475–498, London, 1977.
- [15] E. W. Mansfield. Gravity-induced wrinkle lines in vertical membranes. In *Proceedings of Royal Society*, volume A 375, pages 307–325, London, 1981.
- [16] H. N. Ng and R. L. Grimsdale. Computer graphics techniques for modeling cloth. *IEEE Computer Graphics and Applications*, 16(5):28–41, 1996.
- [17] A. C. Pipkin. Continuously distributed wrinkles in fabrics. *Arch. Rational Mech. Anal.*, 95:93–115, 1986.
- [18] J. C. Platt and A. H. Barr. Constraint methods for flexible models. *Computer Graphics*, 22(4):279–288, 1988.
- [19] F. P. J. Rimrott and M. Cvercko. Wrinkling in thin plates due to in-plane body forces. In *Proc. IUTAM Symp.on Inelastic Behavior of Plates and Shells*, pages 19–48, Rio de Janeiro, 1985.
- [20] F. P. J. Rimrott and X. J. Ma. Tension field theory and spacecraft solar panels. In *Proceedings 8th Symposium on Engineering Applications of Mechanics*, pages 193–201, Sherbrooke, 1986.
- [21] S. A. Segenreich and A. Conci. Displacement behavior of a vertically suspended piece of cloth. In *Proceedings of CSME Mechanical Eng. Forum*, volume 2, pages 123–127, Toronto, 1990.
- [22] D. Terzopoulos, J. Platt, A. H. Barr, and K. Fleischer. Elastically deformable models. *Computer Graphics*, 21(4):205–214, 1987.
- [23] R. Wagner. Ebene blechwandtrager mit sehr dunnem stegblech. *Zeitschrit fur Flugtechnik and Motorluftschiffahrt*, 8:200–207, 1929.
- [24] J. Weil. The synthesis of cloth objects. *ACM – SIGGRAPH Computer Graphics*, 20(4):49–54, 1986.